


# IQSHARE WP32

## User Manual

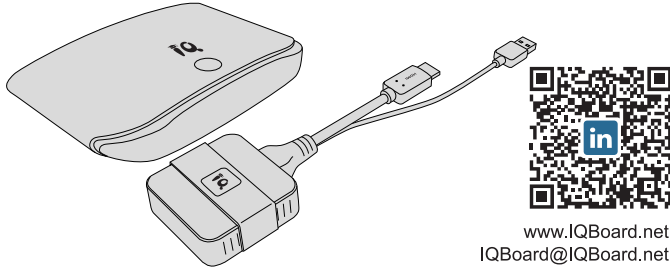

## Attentions

### Before use:


- It is advised to use the provided power adapter in the package with this product.
- Do not leave it under direct sunlight or by heaters.
- Do not place this product in any humid, dusty, or vibrating locations.
- Use a soft, dry cloth for cleaning instead of any volatile solvent.
- When the device is not in use for a while, please turn off the power

### During use:

- Please prevent children from operating the device without supervision.
- Recommended environmental conditions: Temperature: 0°C ~ 40°C (32°F ~ 104°F).
- Humidity: 30% ~ 85% (No condensation).
- Use the product on a stable base, desk, or table.
- Be careful to prevent the unit from dropping or overturning.

## Packing Lists

### 1. IQShare Box



### 2. IQShare Button




### 3. Remote Control



### 4. HDMI Cable




### 5. Power Adapter




### 6. Certificate



### 7. Warranty Card




### 8. User Manual




## Product Review

### Dimensions (Unit: mm)

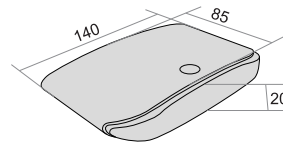


IQShare Box: 140mm\*85mm\*20mm

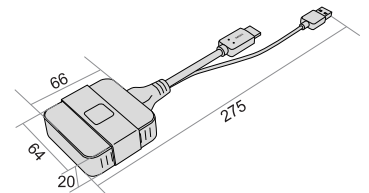

IQShare Button: 64mm\*66mm\*20mm(without wire)  
64mm\*275mm\*20mm(with wire)


### Ports Illustration



- ① Earphone
- ② LAN
- ③ HDMI interface
- ④ USB interface
- ⑤ TF
- ⑥ USB interface
- ⑦ DC Power Jack
- ⑧ Reset


## Connection

### Connect with touch screen

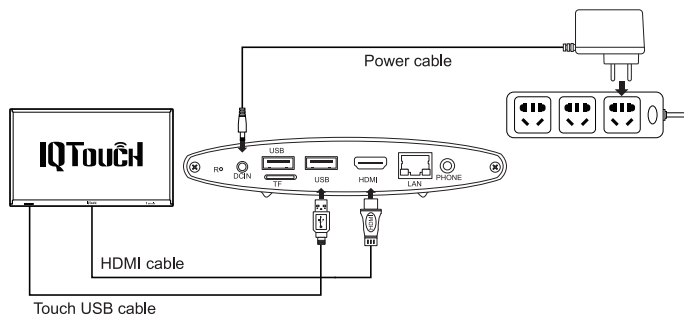

1. Power on IQShare Box.
2. Connect IQShare Box and display screen with HDMI cable and touch USB cable.

### Connect with projector

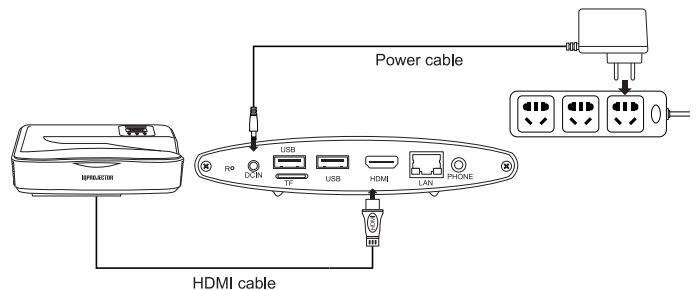


1. Power on IQShare Box.
2. Connect IQShare Box and projector with HDMI cable.


Connect IQSHARE with external device through HDMI cable.

# Enable the device


1.The indicator light will turn blue when power on. The main interface of IQShare Box will show on the display screen.



2. The IQShare Button should be paired with the IQShare Box for the first time connection. Plug the IQShare Button to the USB port of IQShare Box. It will pair automatically after press the button of the IQShare Button. Pull out IQShare Button after pairing successfully.




3.Plug IQShare Button to the HDMI and USB port of external PC (windows or mac), press the middle button of IQShare button to share the PC screen.

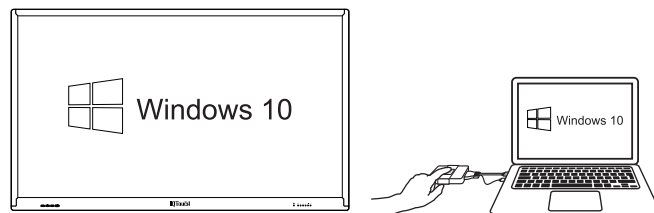

## Mobile Casting


### IOS Casting

Make sure the iPhone and display device are connected to the same network, or use the hotspot of the IQShare Box. Select screen mirroring (Airplay protocol), select the target device and open mirror, share the mobile screen to the display device.

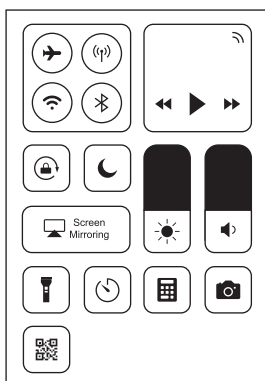

### Android Casting

Make sure your phone is under the same network with IQShare WP32 or use the hotspot of IQShare WP32. Scan the QR code to download the app, after installing, open the app, it will search the display device under the same network automatically, select the target device to share the mobile screen.

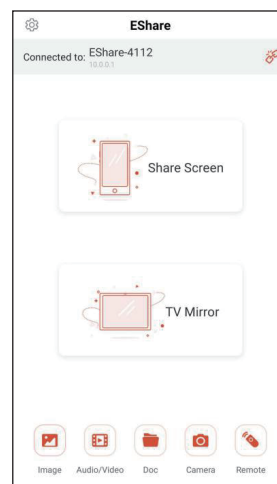

## Trouble Shooting

NO.	Problems	Solutions
1	Connecting Error, Please Check!	Re-plug the IQShare Button or try to reboot of IQShare Box. The IQShare Button needs to be re-paired after resetting or changing the hotspot name and password.
2	The IQShare Box can automatically upgrade when connected to the Internet.	Plug IQShare Button to the HDMI and USB port of IQShare Box, click upgrade if pop-up window appears. Do not unplug the IQShare Button during the process. And need to re-paired after upgrade.
3	Android mobile can't search the hot spot.	Please check if your phone supports 5G network. If no, set as the 2.4G network of IQShare Box. (5G is recommend)
4	Eshare app in Android mobile can't find device.	Please check if the mobile and IQShare Box is connected to the same network segment or not.
5	Android mobile can't cast audio.	Make sure open the Bluetooth and select target device.
6	IOS can't cast screen.	Air play screen casting only supports 9.0 above system.
7	Fail to adjust the resolution.	Please check the cable you connected is HDMI cable.

## Specifications

Model	WP32
Interface	HDMI 1.4*1, USB*2, RJ45*1, Earphone*1, TF(max. 64GB)*1, DC Power Jack*1
Built-in OS	Android
Support OS	Windows 7/8/10, Mac OS
Resolution	720P~1080P
Frame Rate	Up to 60 fps (FHD)
Delay	< 100ms
Display Mode	Mirror and extended desktop
Touch Control	10 Points (Windows 7/8/10), Mouse Mode (Mac OS)
Max Linked Number	1~8
Max Display Wins	1~4
Wireless Bandwidth	Up to 867Mbps
Wireless Transmission Protocol	IEEE 802.11 a/g/n/ac
Wireless Transmission Band	2.4 GHz & 5 GHz (dual band WiFi)
Certification	CE, RoHS